

SK-51.2V100AH (SK-48V100AH)


Lithium Iron Phosphate Battery

Overview

The SK- 51.2V100AH rechargeable lithium battery is optimized for low rate application which requires high energy density.

Features

- LiFePO4 battery, more stable and safe .
- Intelligent BMS equipped inside to maintain the battery always work at best condition .
- Max charge and discharge current as 150A which is specially designed for solar energy .
- Excellent standby self-consumption as low as 4mA .
- Automatically output cut off after 30days no charge and discharge to ensure security , also can cut off output by manual operation .
- Support energy storage inverter manufacturer BMS communication protocol: Deye, Growatt, Voltronic, GOODWE, PYLO, VICTRON, SMA, SOFAR .

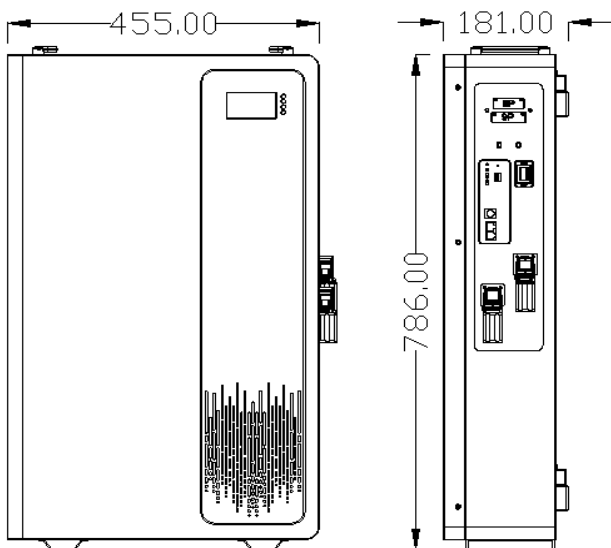

Battery Specification

Nominal Characteristics

Nominal Voltage /V	51.2
Nominal Capacity /Ah (25° C , 0.2C)	100

Mechanical characteristics

Weight (approximate)/Kg	56.5
Dimension L*W*H /mm	786*455*181
Terminal	M8


Electrical characteristics

Voltage window/V	44.8 to 58.4
Float charge voltage/V	55.2
Max. continue discharge current/A	100
Max. pulse discharge current/A	150A 1Sec.
Max. continue charge current/A	50


Operating conditions

Cycle life (+25°C 0.2C 100%DOD)	> 6000 Cycles
Operating temperature	Discharge -10°C to 50°C Charge 0°C to 50°C
Storage temperature	0 to 30°C
Storage duration	6 months at 25°C
Safety standard	UN38.3, IEC62619, CE
IP Degree	IP20


Dis charge curves under diffemet temperatures

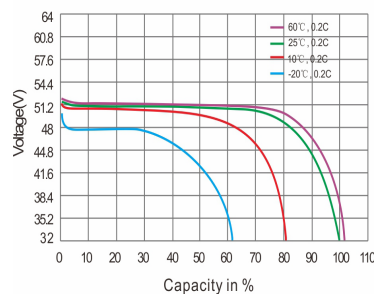

Cycle life vervus DOD and temperature at 0.2C



0.2C CC-CV charge charavteristic

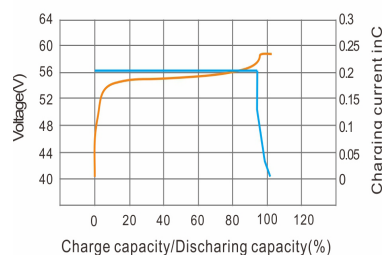

Self-discharge characteristic

